

ECO.36+⁺/T

Magnetic drilling machine

EUROBOOR

FOR PROFESSIONALS BY PROFESSIONALS

Technical data

	Metric	Imperial
Annular cutting	Ø 12 - 36 mm	7/16" - 1 7/16"
Twist drilling (Weldon)	Ø 1 - 14 mm	1/16" - 9/16"
Countersinking	Ø 10 - 40 mm	3/8" - 1 9/16"
Tapping	Ø M3 - M12	1/8" - 1/2"
In-corner drilling	0°: 50 mm	2"
	90°: 53 mm	2 1/16"
	45°: 60 mm	2 3/8"
Length	310 mm	12 3/16"
Width	135 mm	5 5/16"
Height	165 mm	6 1/2"
Stroke	40 mm	1 9/16"
Weight*	10.3 kg	22.7 lbs
Magnet (l x w x h)	160 x 80 x 37 mm	6 5/16" x 3 1/8" x 1 7/16"
Magnetic force	1,200 kg	2,645 lbs
Motor power	1,050 W	8.5 A (110 V / 60 Hz)
Total power	1,100 W	9 A (110 V / 60 Hz)
Speed (no load)		120 - 500 rpm
Speed (load 1,050 W, 8.5 A)		120 - 400 rpm
Spindle (Weldon)	19.05 mm	3/4"
Voltage		110 - 120 V / 60 Hz
		220 - 240 V / 50 - 60 Hz

* Without power cord and handle

Features



Adjustable speed



R/L rotation



Power surge protection



Power fluctuation protection



Gyro-Tec



Automatic shut-off



Carbon brush wear indicator



Magnet LED-indicator (SensorTec)





In-corner: 50 mm (2")



Height: 165 mm (6 1/2")




Tapping

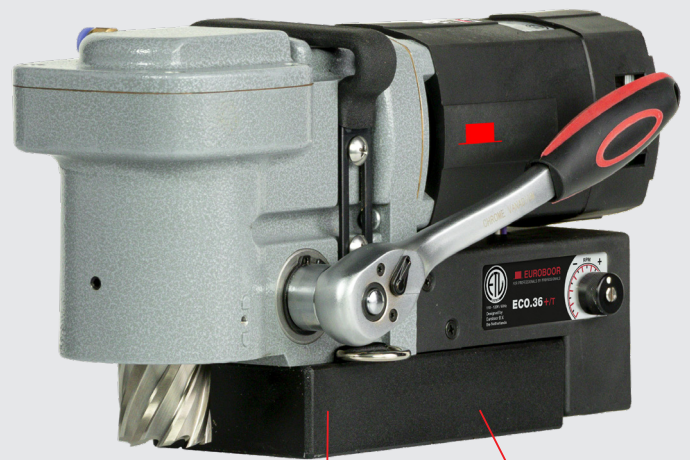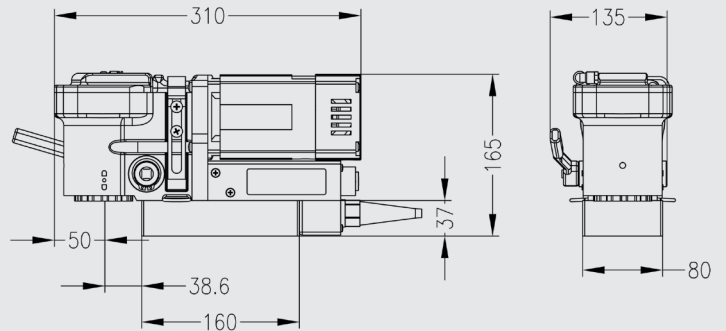

GYRO-TEC

TEMPTec

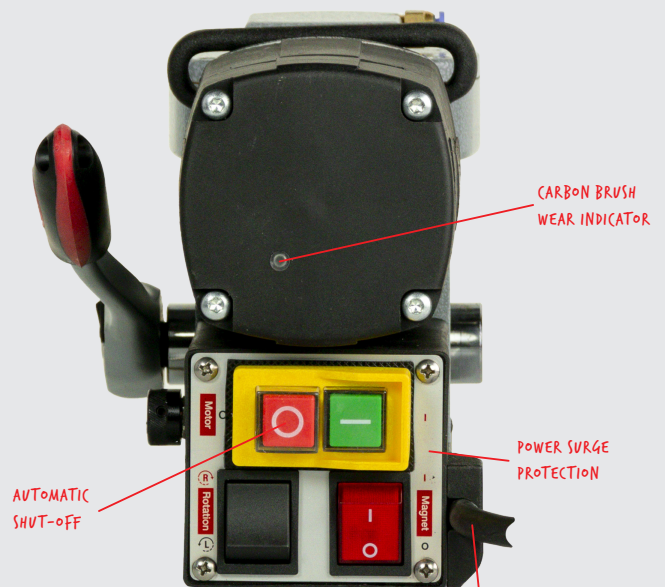

CARBON BRUSH WEAR INDICATOR

AUTOMATIC SHUT-OFF

POWER SURGE PROTECTION

POWER FLUCTUATION PROTECTION

Euroboor makes every effort to meet quality and integrity requirements. That is why we as an organization are proud of the recognition of some leading organizations worldwide:



www.euroboor.com